

# Model: PB3N175B48H

Motor: BE72DC

## ◆ 1.General Characters

1-1	Rated Voltage	48VDC
1-2	Operating Voltage	36~57 VDC
1-3	Rated Speed	3100 RPM
1-4	Input Current	0.8 A
1-5	Input Power	38.4 W
1-6	Air Flow	332.50 CFM / 565 m <sup>3</sup> /H
1-7	Static Pressure	1.61 inH <sub>2</sub> O / 402 Pa
1-8	Acoustical Noise	65 dB(A)
1-9	Life Expectance	50,000 Hours(L10) At 40°C room, humidity 15%~65%RH.
1-10	Insulation Class	Class B
1-11	Motor Protection	Locked rotor protection Polarity protection Automatic restart capability
1-13	Speed Control	Control input 0~10VDC / PWM
1-14	Protection Type	IP44
1-15	Signal Output	FG (Frequency Generator)

## Model: PB3N175B48H

Motor: BE72DC

### ◆ 2. Mechanical Characters

2-1	Dimension	Ø175mm X 68mm (see dimension drawing)
2-2	Material of Impeller	PA6+GF
2-3	Number of Blades	7
2-4	Bearing System	NMB ball bearing
2-5	Lead Wire	AC(AWG20#), DC(AWG22 #)


### ◆ 3. Environmental Characters

3-1	Operating Temperature	-25°C to 60°C
3-2	Storage Temperature	-40°C to 75°C
3-3	Operating Humidity	5% to 90% RH
3-4	Storage Humidity	5% to 95% RH

**Model: PB3N175B48H**

**Motor: BE72DC**

◆ **4. Performance Curve**

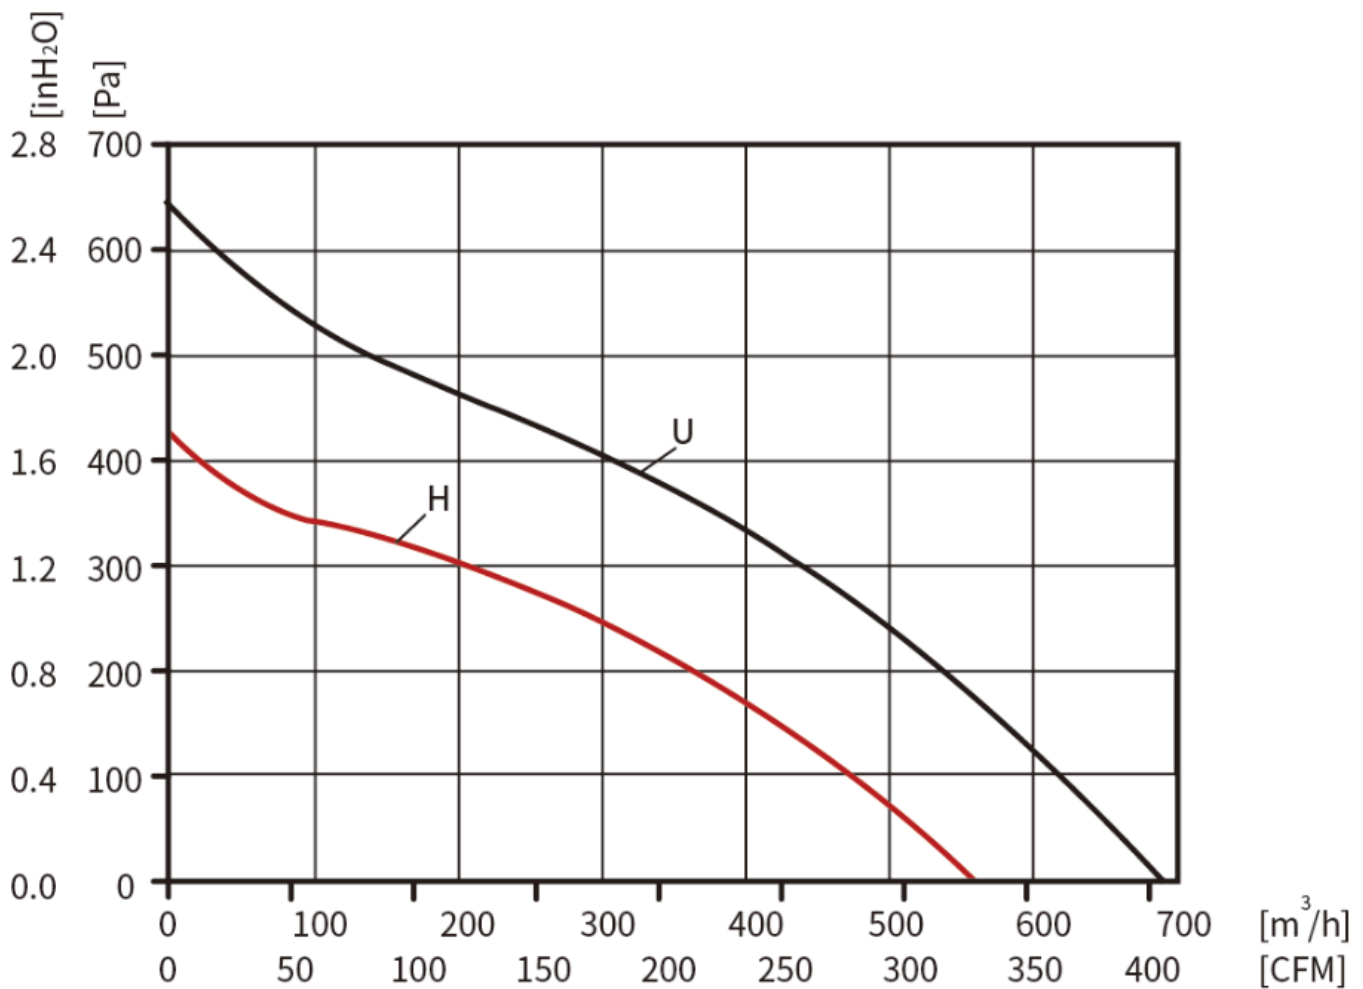

**Testing Condition**

Input Voltage----Operating voltage (48VDC)

Temperature-----Room temperature

Humidity-----65%RH

