

Model: PS3N100B24M

Motor: BE53DC

◆ 1.General Characters

| | | |
|------|-------------------|--|
| 1-1 | Rated Voltage | 24VDC |
| 1-2 | Operating Voltage | 16~28 VDC |
| 1-3 | Rated Speed | 2800 RPM |
| 1-4 | Input Current | 1 A |
| 1-5 | Input Power | 24 W |
| 1-6 | Air Flow | 66.74 CFM / 113.4 m ³ /H |
| 1-7 | Static Pressure | 1.35 inH ₂ O / 338 Pa |
| 1-8 | Acoustical Noise | 56 dB(A) |
| 1-9 | Life Expectance | 50,000 Hours(L10) At 40°C room, humidity 15%~65%RH. |
| 1-10 | Insulation Class | Class B |
| 1-11 | Motor Protection | Locked rotor protection Polarity protection Automatic restart capability |
| 1-13 | Speed Control | Control input 0~10VDC / PWM |
| 1-14 | Protection Type | IP44 |
| 1-15 | Signal Output | FG (Frequency Generator) |

Model: PS3N100B24M**Motor: BE53DC****◆ 2. Mechanical Characters**

| | | |
|-----|----------------------|--|
| 2-1 | Dimension | 154mm X 137mmX 118mm (see dimension drawing) |
| 2-2 | Material of Impeller | Galvanized Metal Shell |
| 2-3 | Number of Blades | 34 |
| 2-4 | Bearing System | NMB ball bearing |
| 2-5 | Lead Wire | AC(AWG20#), DC(AWG22 #) |


◆ 3. Environmental Characters

| | | |
|-----|-----------------------|---------------|
| 3-1 | Operating Temperature | -25°C to 60°C |
| 3-2 | Storage Temperature | -40°C to 75°C |
| 3-3 | Operating Humidity | 5% to 90% RH |
| 3-4 | Storage Humidity | 5% to 95% RH |

Model: PS3N100B24M

Motor: BE53DC

◆ 4. Performance Curve

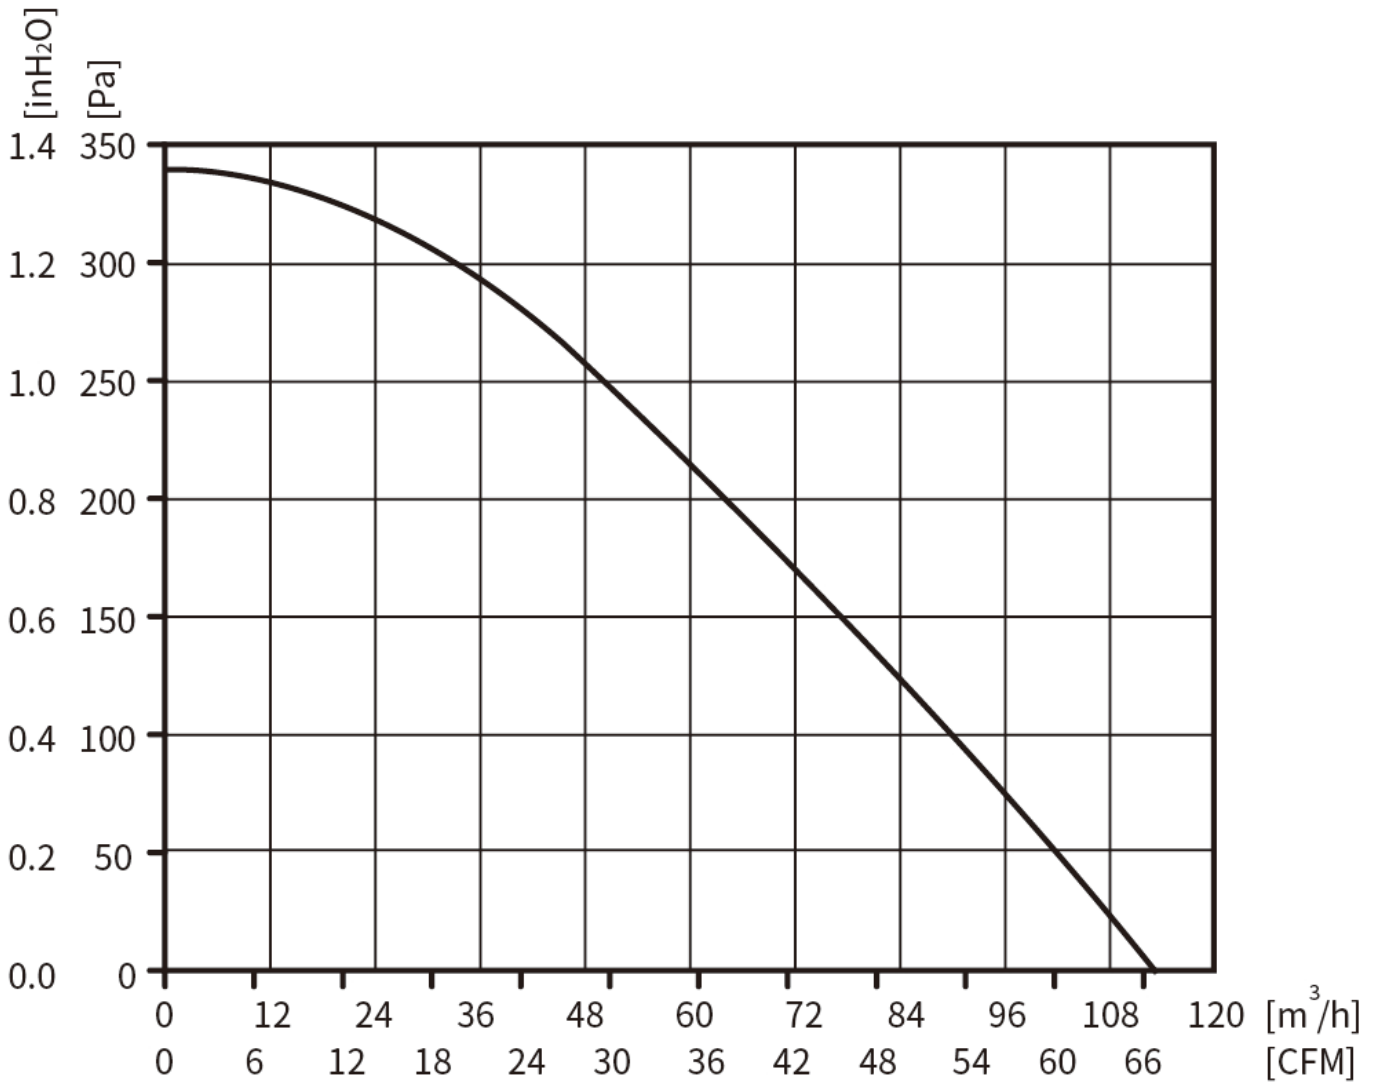

Testing Condition

Input Voltage----Operating voltage (24VDC)

Temperature-----Room temperature

Humidity-----65%RH

