

# Model: PB3N310B24L

Motor: BE92DC

## ◆ 1.General Characters

1-1	Rated Voltage	24VDC
1-2	Operating Voltage	16~28 VDC
1-3	Rated Speed	1600 RPM
1-4	Input Current	5.2 A
1-5	Input Power	124.8 W
1-6	Air Flow	1279.99 CFM / 2175 m <sup>3</sup> /H
1-7	Static Pressure	2.01 inH <sub>2</sub> O / 502 Pa
1-8	Acoustical Noise	64 dB(A)
1-9	Life Expectance	50,000 Hours(L10) At 40°C room, humidity 15%~65%RH.
1-10	Insulation Class	Class B
1-11	Motor Protection	Locked rotor protection Polarity protection Automatic restart capability
1-13	Speed Control	Control input 0~10VDC / PWM
1-14	Protection Type	IP44
1-15	Signal Output	FG (Frequency Generator)

**Model: PB3N310B24L****Motor: BE92DC****◆ 2. Mechanical Characters**

2-1	Dimension	Ø310mm X 150mm (see dimension drawing)
2-2	Material of Impeller	Aluminium Sheet
2-3	Number of Blades	6
2-4	Bearing System	NMB ball bearing
2-5	Lead Wire	AC(AWG20#), DC(AWG22 #)


**◆ 3. Environmental Characters**

3-1	Operating Temperature	-25°C to 60°C
3-2	Storage Temperature	-40°C to 75°C
3-3	Operating Humidity	5% to 90% RH
3-4	Storage Humidity	5% to 95% RH

## Model: PB3N310B24L

Motor: BE92DC

### ◆ 4. Performance Curve

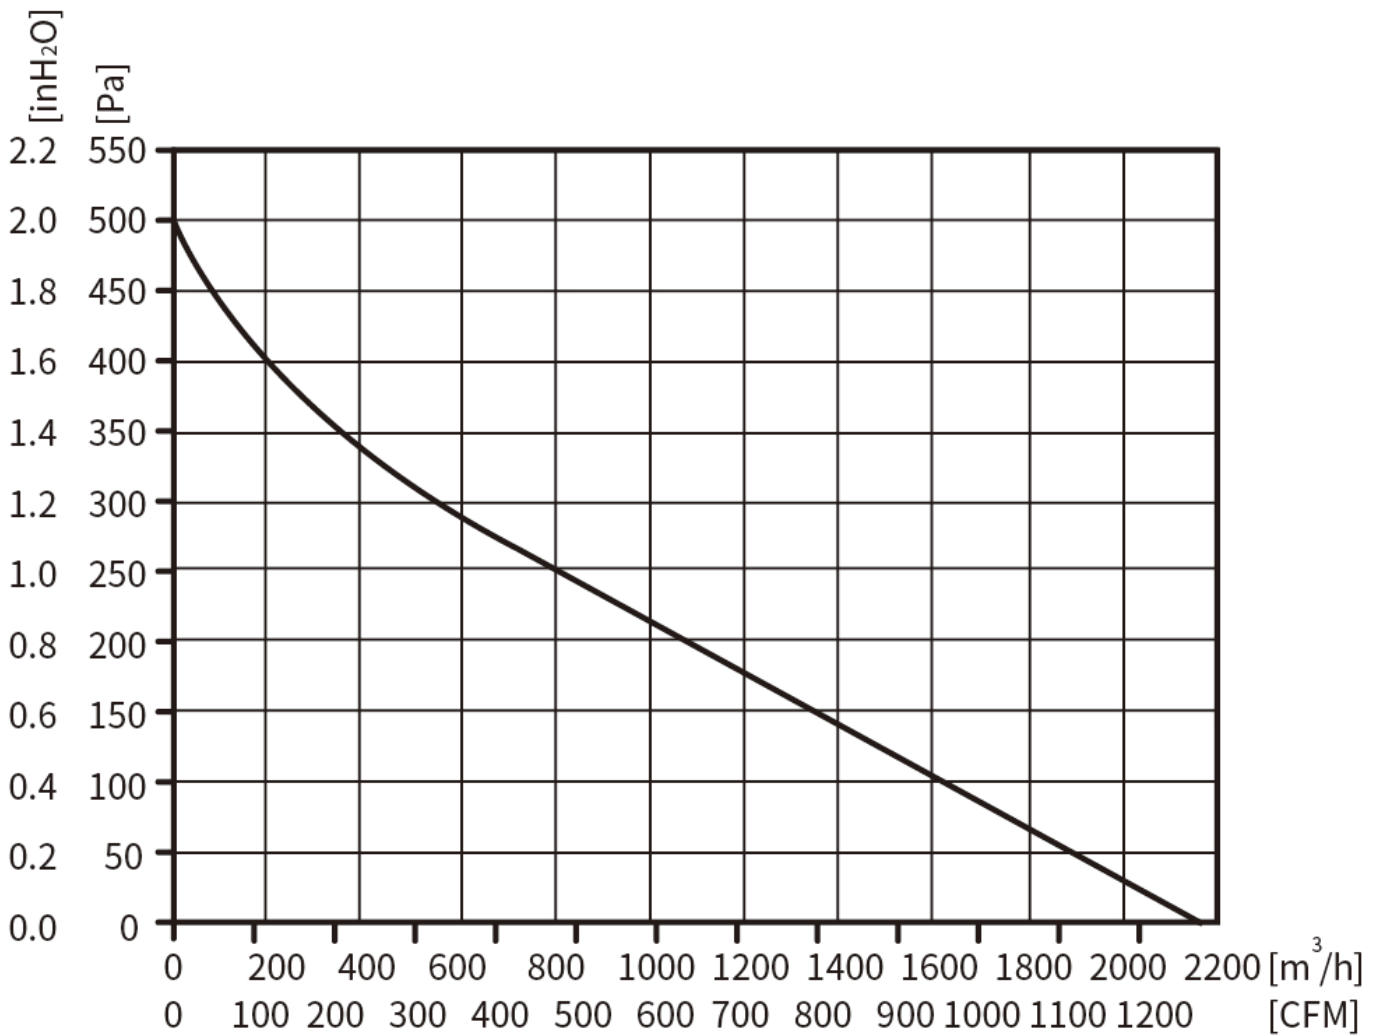

#### Testing Condition

Input Voltage----Operating voltage (24VDC)


Temperature-----Room temperature

Humidity-----65%RH

## Model: PB3N310B24L

Motor: BE92DC

### ◆ 5. Outline Drawing

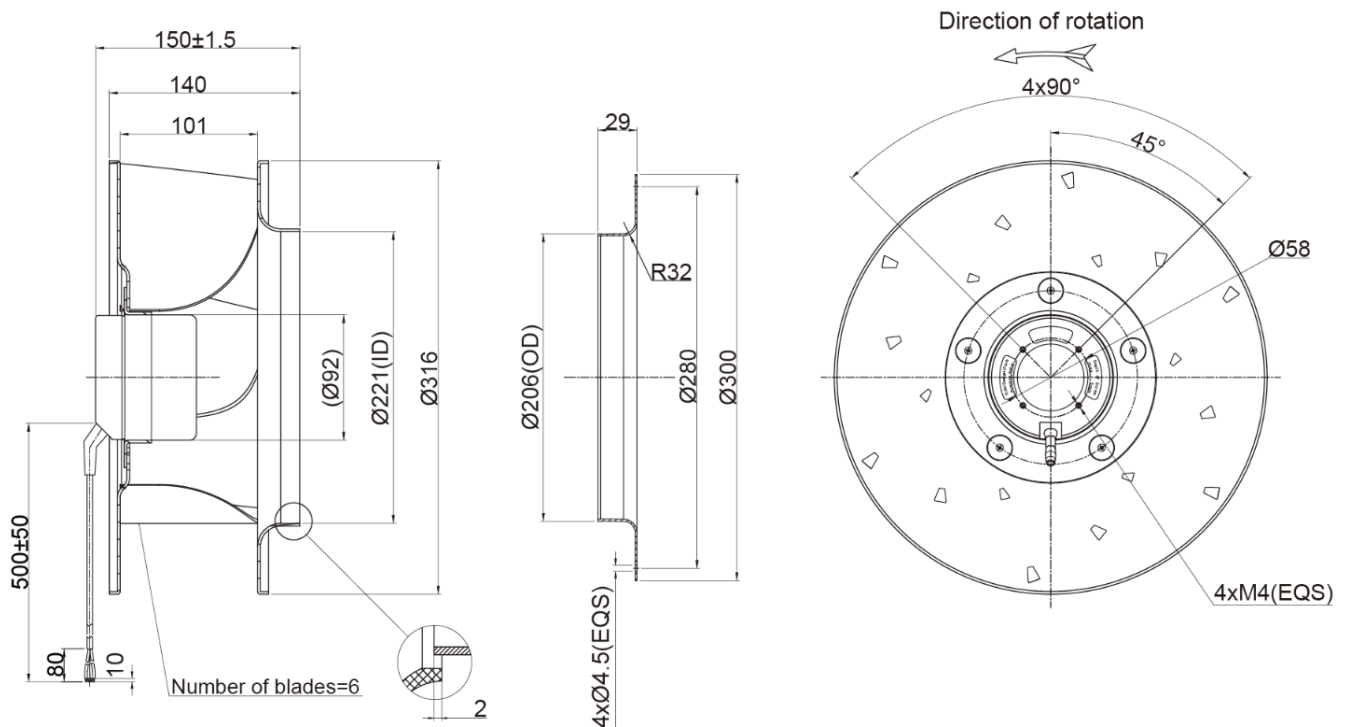

#### Note

- 1.Connection line:DC(4×AWG22#)
- 2.DC: Red=Voltage Input 24VDC, Yellow=0-10VDC/PWM, White=FG, Blue=GND;