

Model: PB3N310B48H

Motor: BE102DC

◆ 1.General Characters

1-1	Rated Voltage	48VDC
1-2	Operating Voltage	36~57 VDC
1-3	Rated Speed	1930 RPM
1-4	Input Current	4.4 A
1-5	Input Power	211.2 W
1-6	Air Flow	1541.87 CFM / 2620 m ³ /H
1-7	Static Pressure	2.31 inH ₂ O / 578 Pa
1-8	Acoustical Noise	69 dB(A)
1-9	Life Expectance	50,000 Hours(L10) At 40°C room, humidity 15%~65%RH.
1-10	Insulation Class	Class B
1-11	Motor Protection	Locked rotor protection Polarity protection Automatic restart capability
1-13	Speed Control	Control input 0~10VDC / PWM
1-14	Protection Type	IP44
1-15	Signal Output	FG (Frequency Generator)

Model: PB3N310B48H

Motor: BE102DC

◆ 2. Mechanical Characters

2-1	Dimension	Ø310mm X 150mm (see dimension drawing)
2-2	Material of Impeller	Aluminium Sheet
2-3	Number of Blades	6
2-4	Bearing System	NMB ball bearing
2-5	Lead Wire	AC(AWG20#), DC(AWG22 #)


◆ 3. Environmental Characters

3-1	Operating Temperature	-25°C to 60°C
3-2	Storage Temperature	-40°C to 75°C
3-3	Operating Humidity	5% to 90% RH
3-4	Storage Humidity	5% to 95% RH

Model: PB3N310B48H

Motor: BE102DC

◆ 4. Performance Curve

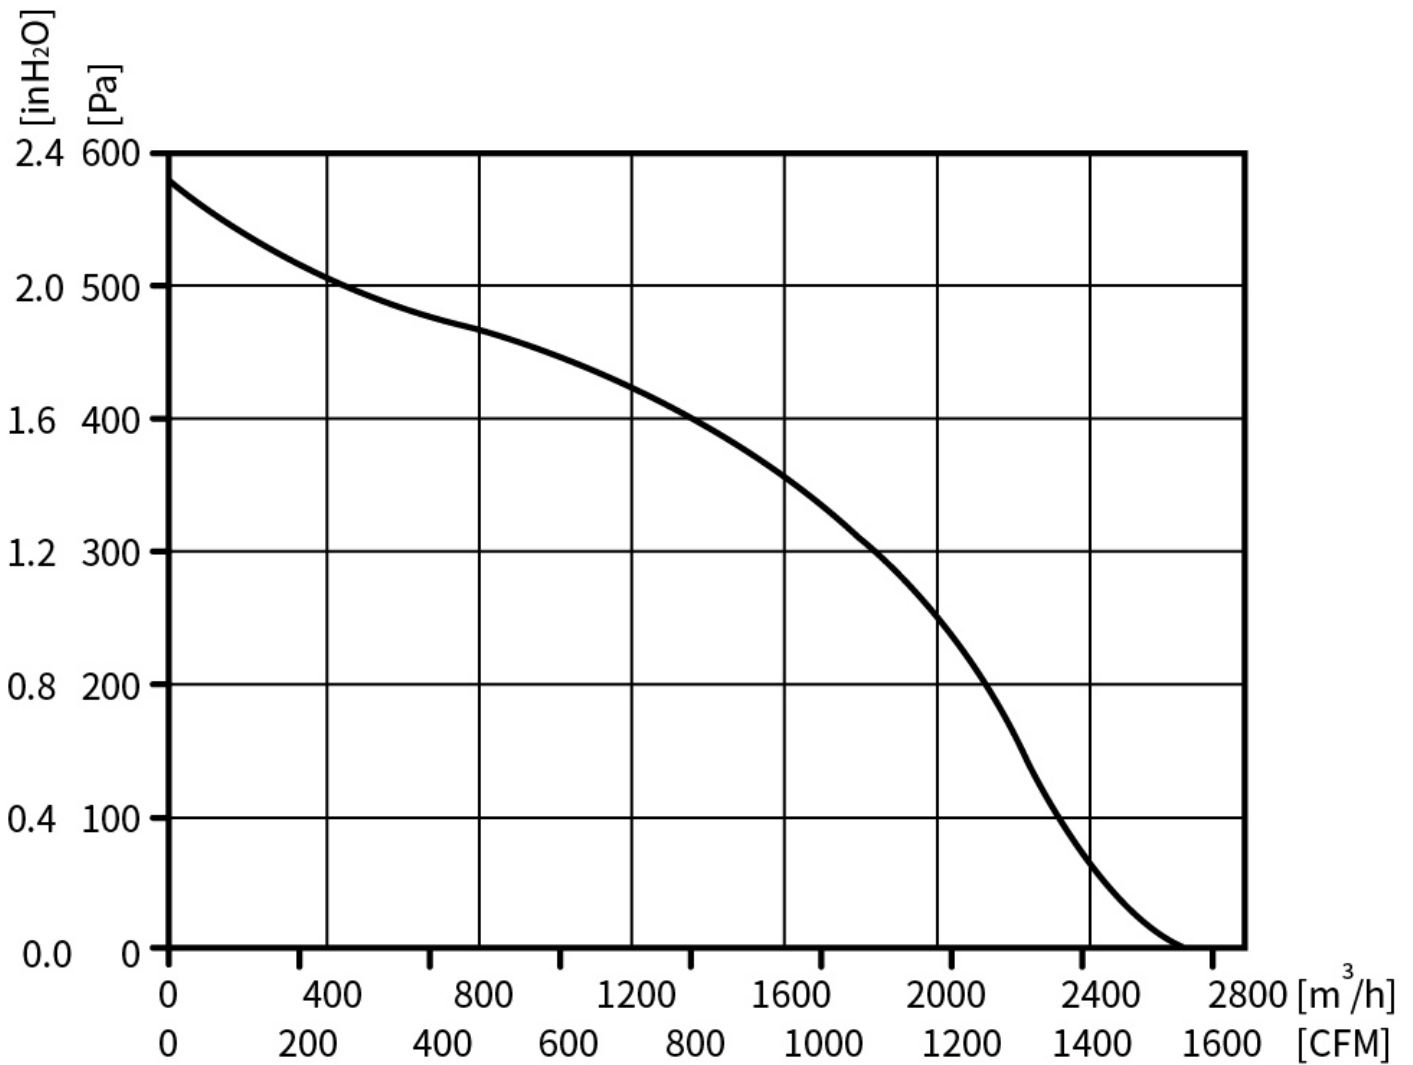

Testing Condition

Input Voltage----Operating voltage (48VDC)

Temperature-----Room temperature

Humidity-----65%RH

