

2026-06-17

V00

PBM

SPECIFICATION FOR APPROVAL

Customer: Customer
Model No: **PA4056B12U**
Motor Type: External rotor DC motor



PBM Motor and Fan (Suzhou) Co., Ltd

Website: www.pbmmf.com

<http://szpbjd.en.made-in-china.com>

<http://pbmmf.en.alibaba.com>

EMAIL: XXX@pbmmf.com

TEL: 86-512-68581674

FAX: 86-512-68581574

CELL PHONE: 86-XXX

Factory: No.8, Zhu Street, Suzhou Industrial Park, Suzhou City, P. R. China 215121

Address: No.8, Zhu Street, Suzhou Industrial Park, Suzhou City, P. R. China 215121

Customer Approved

Customer

PBM Checked By

Nick

This specification defines the Mechanical and Electrical characteristics of the DC brushless external rotor motorized axial fan.

Model: PA4056B12U**Motor: External rotor DC motor****◆ 1.General Characters**

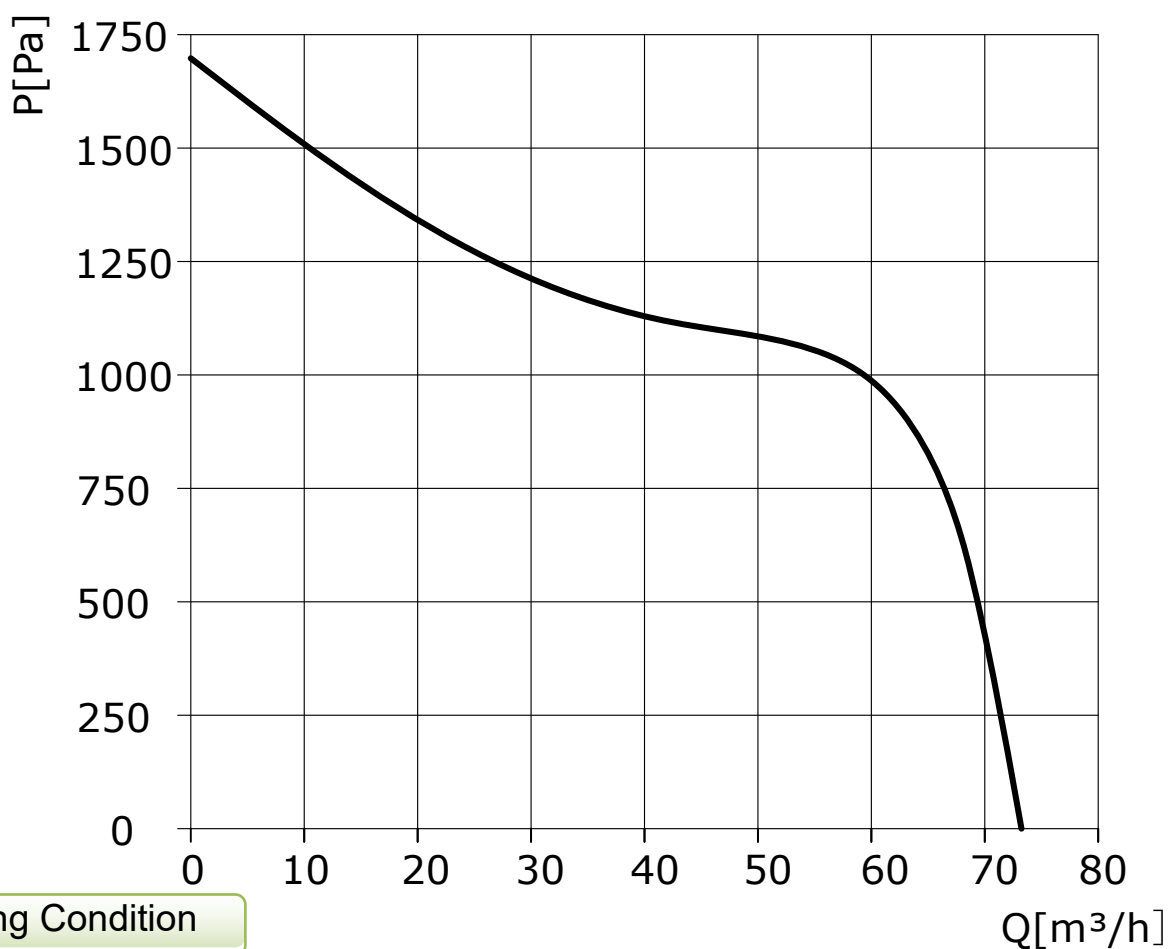
1-1	Rated Voltage	DC 12 V
1-2	Starting Voltage	DC 7 V
1-3	Operating Voltage	7-13.2 VDC
1-4	Rated Speed	27500 RPM
1-5	Input Current	3.3A
1-6	Input Power	39.60 W
1-7	Air Flow	72.6m ³ /h
1-8	Static Pressure	1694Pa
1-9	Acoustical Noise	77dB(A)
1-10	Life Expectance	50,000 Hours At nominal supply voltage, full speed room temperature 40℃.65 %RH
1-11	Weight	90g

◆ 2. Mechanical Characters

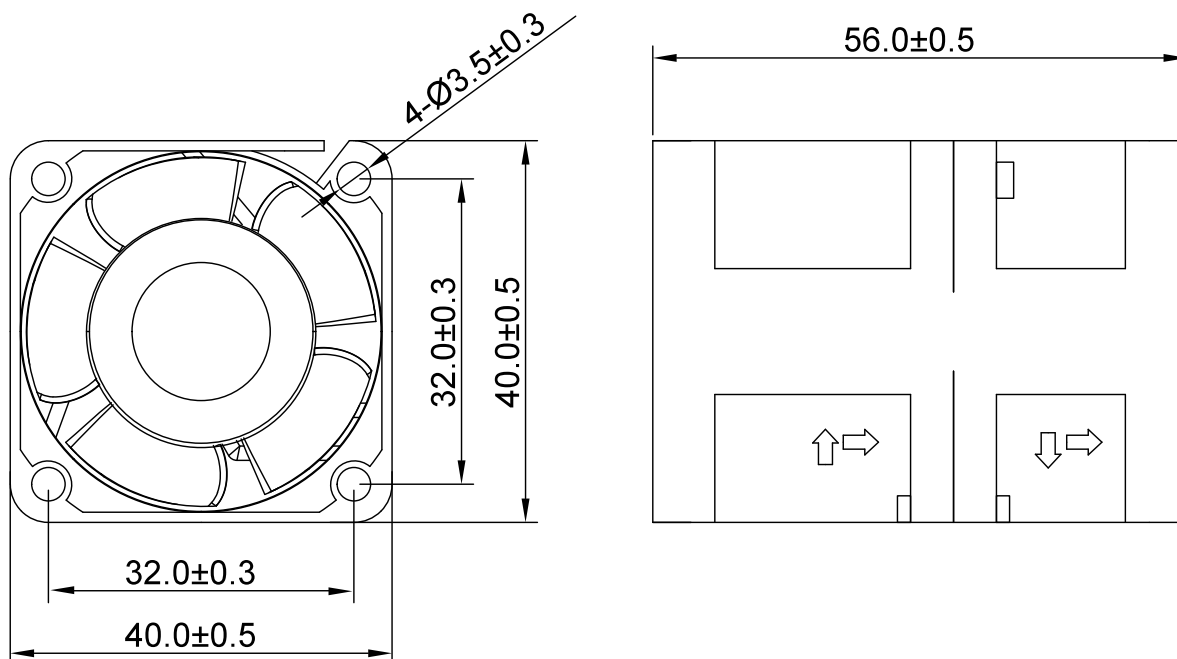
2-1	Dimension	40mm*40mm*56mm (See dimension drawing)
2-2	Material of Impeller	Plastic
2-3	Lead Wire	#26AWG UL1061 L=300±10mm
2-4	Mounting Position	Any
2-5	Surface of Rotor	Coated in black
2-6	Bearing System	ball bearing

Model: PA4056B12U**Motor: External rotor DC motor****◆ 3. Environmental Characters**

3-1	Operating Temperature	-10℃ to 60℃
3-2	Storage Temperature	-40℃ to 75℃
3-3	Operating Humidity	5% to 95% RH
3-4	Storage Humidity	5% to 95% RH
3-5	RoHS	All the material meets RoHS standard.

◆ 4. Performance Curve**Testing Condition**

Input Voltage----Operating voltage (12 VDC)
Temperature----Room temperature
Humidity-----65%RH

Model: PA4056B12U**Motor: External rotor DC motor****◆ 5. Outline Drawing**

Model: PA4056B12U**Motor: External rotor DC motor****◆ 6 . Safety Requirements**

1. Make sure that the metal casing of the stator connected to the ground before being powered on.
2. Fan needs a few seconds to start after being powered on. To prevent personal injury, do not touch the impellers or rotor when the power is on or in a low speed.
3. Unless they are instructed by the person(s) responsible for their safety, those who are lack of physical, mental or sensory capacities and proper practical experience or expertise cannot use this appliance. Please do not let the children play with this product.
4. If the power cord be damaged, the power cord must be replaced by the manufacturer in order to avoid accident of the proxy service personnel or the equivalent qualification maintenance personnel.
5. Please carefully read this technical specification before using the product.